

# KIMTECH™

## Kimtech™ G3 White Nitrile Gloves



Deliver enhanced  
**contamination protection**

Ideal for handling  
**delicate equipment**

**Textured fingertips**  
enhance grip and tactile  
sensitivity


**Kimtech™ G3 White Nitrile Gloves** are ideal for handling delicate equipment in microelectronics, semiconductor, optics and non-sterile pharmaceutical applications; when the highest levels of sensitivity, protection and performance are required. The high quality nitrile gloves deliver seamless protection when and where it is needed, and are suitable for ISO Class 3 or higher cleanroom environments.

The nitrile polymer material is designed for fit and reliability, with textured fingertips for improved grip and excellent water tightness with a low risk of pinholes. The gloves are ambidextrous and incorporate a beaded cuff for added strength and ease of donning, so the wearer can simply grab and go without any

fear of ripping the material. Our non-sterile nitrile safety gloves are also latex-, silicone- and powder-free. The absence of natural rubber latex reduces the risk of TYPE 1 glove-associated reactions, protecting the wearer as well as the application.

During manufacture the gloves are washed repeatedly in ultrapure deionised water to ensure consistent control of particles and extractables. The gloves are designated as PPE Cat III according to (EU) Regulation 2016/425 and are provided double-bagged in cleanroom-compatible polyethylene and case liner so as to be easily integrated into your processes.


## Kimtech™ G3 White Nitrile Gloves

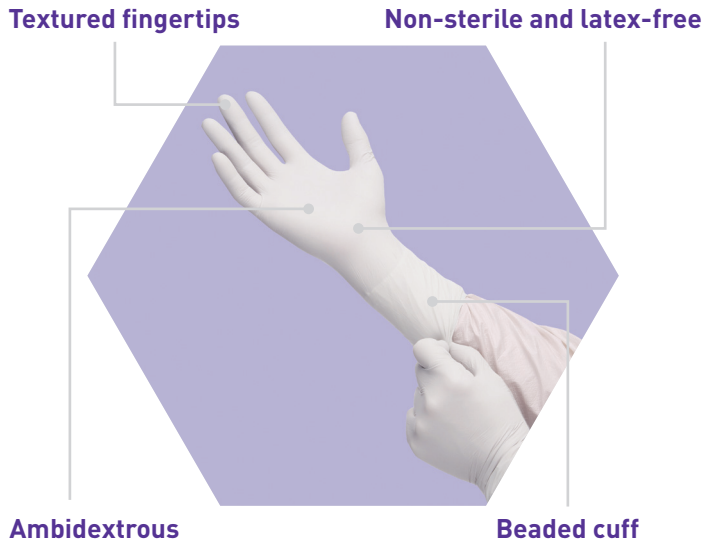

### Quality Standards

- › Certificate of Analysis available online
- › Packaged to meet ISO Class 3 Cleanroom standard
- › Manufactured in accordance with Quality System ISO 9001

### Size Guide

SIZE	CODE	LENGTH	QUANTITY 10x per case
XS	HC61010	30.5cm	 100 gloves/ bag = 1,000 gloves
S	HC61011	30.5cm	
M	HC61012	30.5cm	
L	HC61013	30.5cm	
L+	HC69478	30.5cm	
XL	HC61014	30.5cm	

### Product Specifications

CHARACTERISTIC	VALUE	TEST METHOD	
- Freedom from holes	AQL 1.5 <sup>2</sup>	EN 374-2:2014 and ASTM D 5151	
<b>TENSILE PROPERTIES</b>	<b>TENSILE STRENGTH</b>	<b>ULTIMATE ELONGATION</b>	
- Before aging	24 MPa, nominal	600% nominal	
- After accelerated aging	20 MPa, nominal	600% nominal	
<b>DIMENSION</b>	<b>NOMINAL THICKNESS/WIDTH</b>		
Thickness (mm)	Middle finger	Palm	Cuff
	0.16	0.13	0.10
Palm width (mm)	XS	S	M
	74	84	96
	L	L+	XL
	111	116	123
<b>PARTICLES (Maximum)</b>			
Per cm <sup>2</sup> > 0.5 micron	<950	IEST-RP-CC005	

### Key Features

- › Industry-leading disposable nitrile gloves offer high levels of protection, cleanliness and quality
- › Nitrile<sup>1</sup> construction results in products that are stronger and leaner than latex gloves, and feature better protection against a wide range of contaminants including micro-organisms, viruses and chemical splash
- › Textured fingertips enhance grip and tactile sensitivity for safer and more efficient processes

### Assured Compliance

- › PPE Cat III according to Regulation (EU) 2016/425
- › EN ISO 374-1:2016 Type C (K) Chemical Splash protection
- › EN 374-4:2014 Resistance to degradation by chemicals
- › EN ISO 374-5:2016 Micro Organism and VIRUS Protection



CE 0123

CLEANLINESS CHARACTERISTICS	LIMIT		TEST METHOD
<b>Particles</b>			
Per cm <sup>2</sup> ≥ 0.5 micron	950		IEST-RP-CC005
<b>Extractables</b>	µg/g	µg/cm <sup>2</sup>	IEST-RP-CC005
Sodium (Na <sup>+</sup> )	10	0.07	
Ammonium (NH <sub>4</sub> <sup>+</sup> )	5	0.03	
Potassium (K <sup>+</sup> )	5	0.03	
Magnesium (Mg <sup>2+</sup> )	5	0.03	
Calcium (Ca <sup>2+</sup> )	45	0.30	
Chloride (Cl <sup>-</sup> )	35	0.23	
Nitrate (NO <sub>3</sub> <sup>-</sup> )	15	0.10	
Sulfate (SO <sub>4</sub> <sup>2-</sup> )	10	0.07	
Zinc (Zn <sup>2+</sup> )	25	0.17	